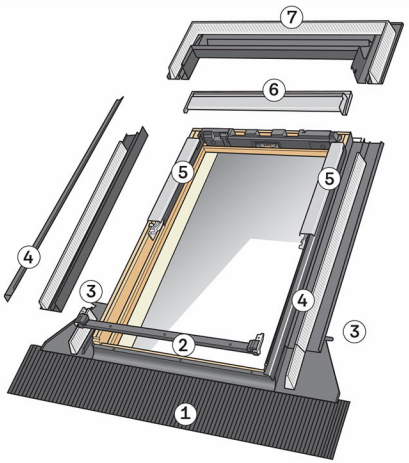
EW





VELUX®

15°–90°

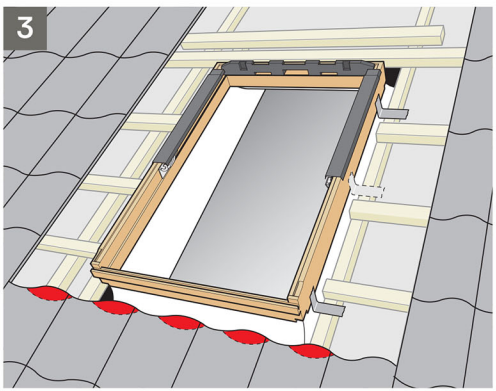
max 120 mm

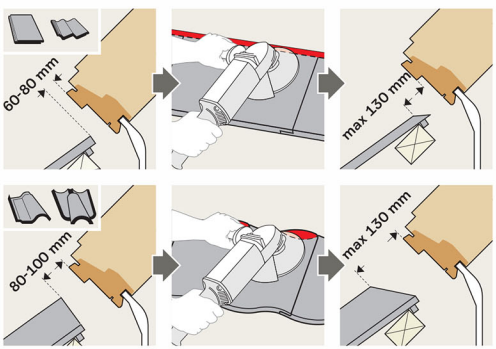
VAS 454098-2025-07



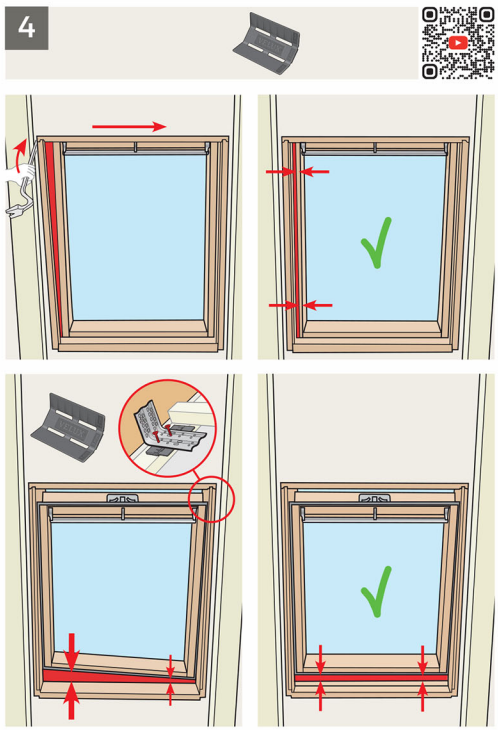


2 VELUX®

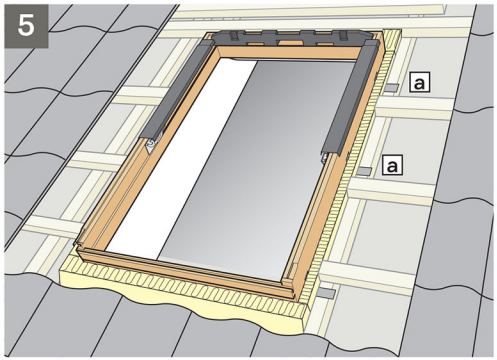






VELUX® 3

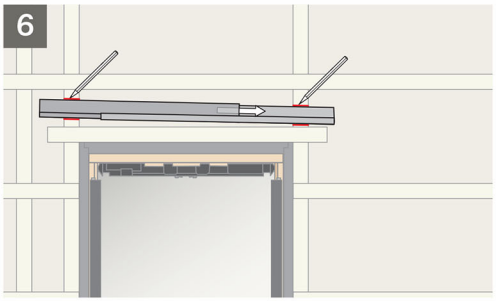


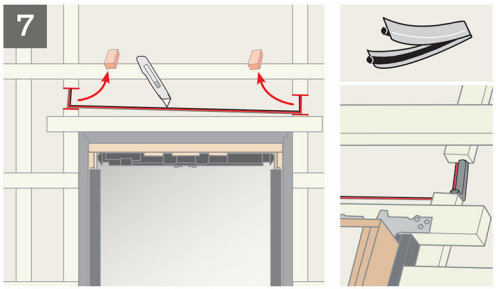
4 VELUX®



5
a
a






BFX

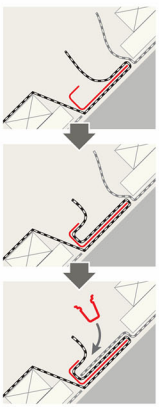

6



7


8

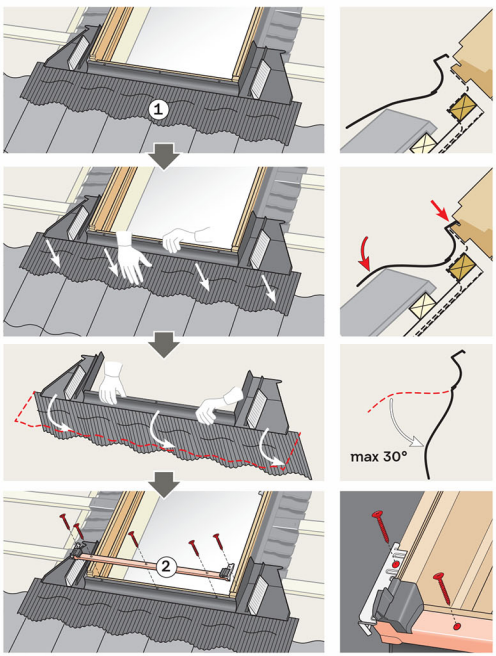

1
2
90°

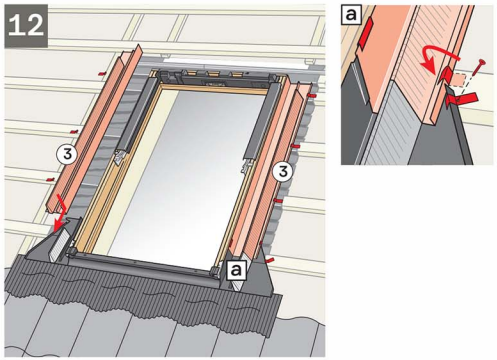

9

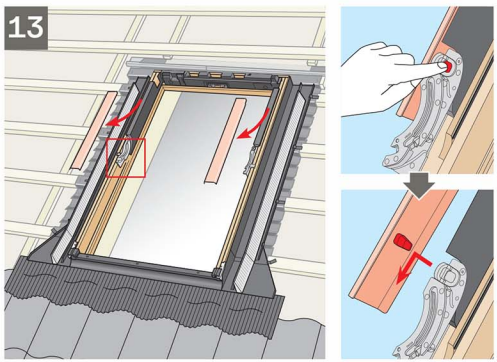


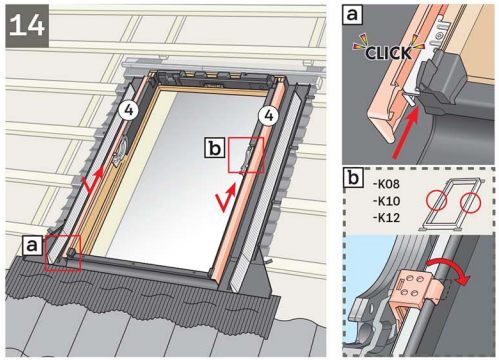

10

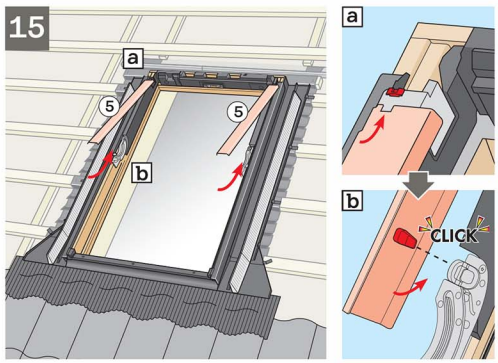

11

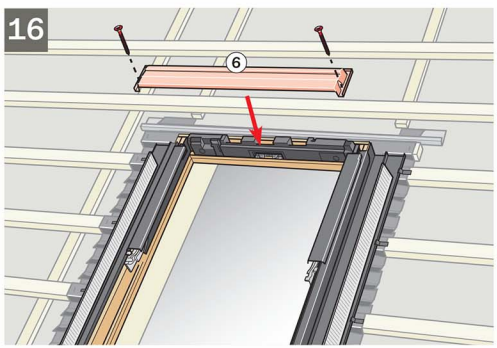

1
max 30°
2

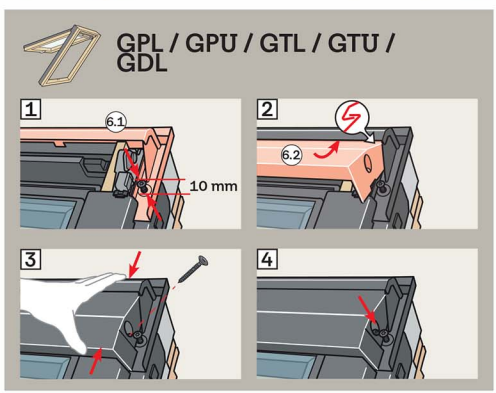

12
3
3
a
a

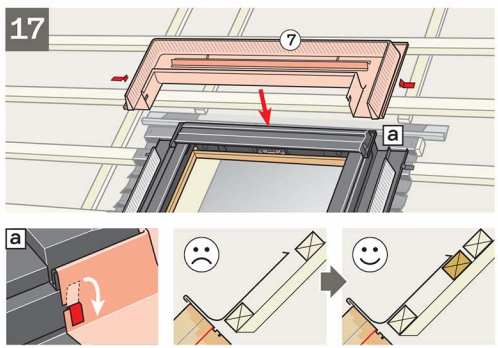

13

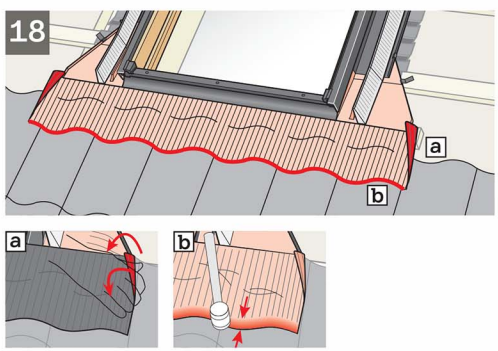

14
4
4
b
a
a
CLICK
b
-K08
-K10
-K12

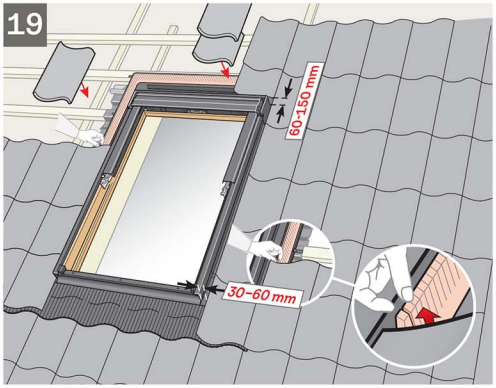

15
a
5
5
b
a
b
CLICK

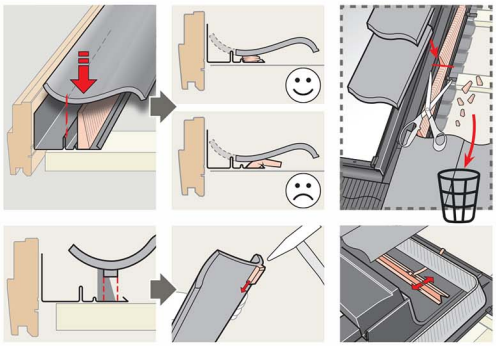

16
6


GPL / GPU / GTL / GTU / GDL
1
6.1
10 mm
2
6.2
3
4


17
7
a
a


18
a
b
a
b





VELUX®

www.velux.com

velux.com/contact

INSTALLATION INSTRUCTION FOR FLASHING EW, EDW16, 2025 VELUX GROUP. VELUX AND THE VELUX LOGO ARE REGISTERED TRADEMARKS USED UNDER LICENCE BY THE VELUX GROUP