
BFX 1000

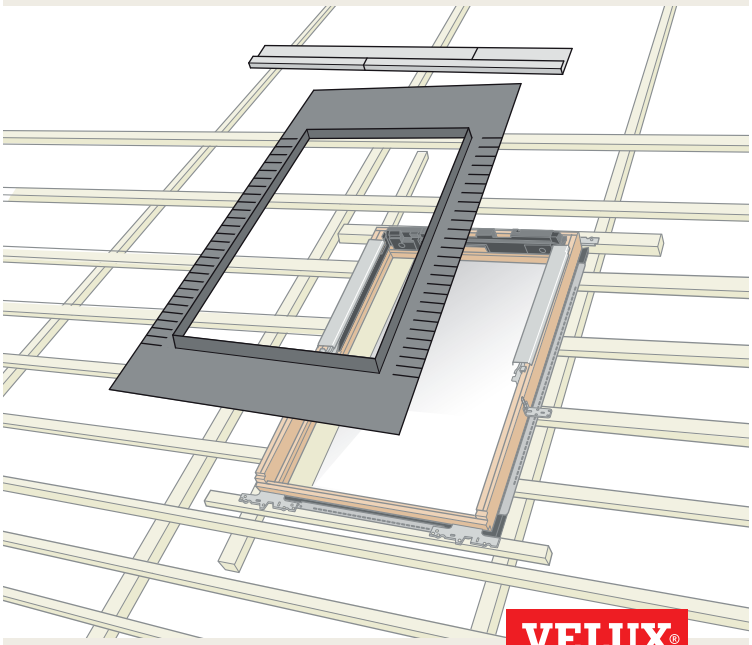

VELUX®

15°–90°


VAS 453298 2025-09


VELUX®

INSTALLATION INSTRUCTIONS FOR BFX 1000. ©2012, 2025 VELUX GROUP. ®VELUX AND THE VELUX LOGO ARE REGISTERED TRADEMARKS USED UNDER LICENCE BY THE VELUX GROUP.

www.velux.com

velux.com/contact

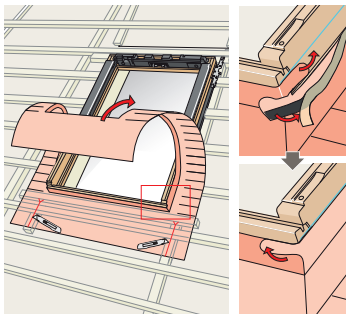



CE 13	
EN 13859-1:2014 Notified body: 0338	
BFX	
Flexible sheet for underlays for roofs	
Reaction to fire:	Class E
Resistance to water penetration: - before artificial ageing: - after artificial ageing:	 Class W1 Class W1
Tensile strength in longitudinal direction: - before artificial ageing: - after artificial ageing:	 200 N/50 mm 120 N/50 mm
Tensile strength in transverse direction: - before artificial ageing: - after artificial ageing:	 200 N/50 mm 120 N/50 mm
Elongation in longitudinal direction: - before artificial ageing: - after artificial ageing:	 NPD NPD
Elongation in transverse direction: - before artificial ageing: - after artificial ageing:	 NPD NPD
Tear resistance: - longitudinal direction: - transverse direction:	 NPD NPD
Flexibility at low temperature (pliability):	NPD
Artificial ageing behavior, concerning: - resistance to water penetration: - tensile strength:	 NPD NPD
VELUX A/S Ådalsvej 99 DK-2970 Hørsholm www.velux.com/ce	